

# FUENTE SWITCHING 120W



De fácil instalación gracias a su tamaño compacto.

Alta eficiencia de transferencia.

100% Loaded. Protección contra corto-circuito.

VOLTAJE DE SALIDA **12V / 24V**

CARGA **120 W**

EFICIENCIA **82%**



AÑOS  
DE GARANTÍA




# FUENTE SWITCHING 120W

## Especificaciones técnicas


CÓDIGO	8PS120120DCU	8PS240120DCU
<b>OUTPUT</b>		
DC Voltage	12V	24V
Rated current	10A	5A
Rated power	120W	120W
Ripple & noise (max)	<500mVp-p	<500mVp-p
Setup, rise time	1500ms/230VAC	1500ms/230VAC
Line regulation	1%	1%
Load regulation	1%	1%
<b>INPUT</b>		
Voltage	170~250V	170~250V
Frecuency	50/60Hz	50/60Hz
Efficiency	82%	82%
Power factor	0.6	0.6
Current	230V:1.3A max.	230V:1.3A max.
Inrush current	40A	40A
<b>PROTECTION</b>		
Open circuit	Yes, output voltage drops if overload 10~20%	
Short circuit	Yes, hiccup mode, recovers automatically after fault condition is removed	
<b>ENVIRONMENT AND OTHERS</b>		
Working temperature	-30~60°C	-30~60°C
Working humidity	20~90%RH	20~90%RH
Storage temp.	-40~80°C	-40~80°C
Storage humidity	10~95%RH	10~95%RH
Life spam	50K hours @ 20 °C working temperature	
<b>STANDARD REQUEST</b>		
Safety	EN61347-2-13	EN61347-2-13
Withstand voltage	I/P-0/P:3.75KVAC I/P-GND:1.5KVAC	I/P-0/P:3.75KVAC I/P-GND:1.5KVAC
Isolation resistance	I/P-0/P:>100M Ohms / 500VDC / 25°C / 70%RH	

# FUENTE SWITCHING 120W

## Derating curve

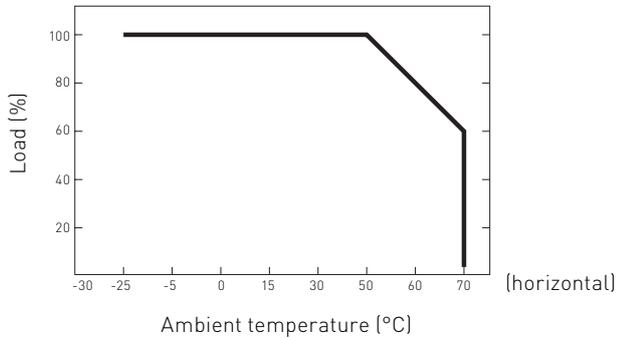

## Instalación

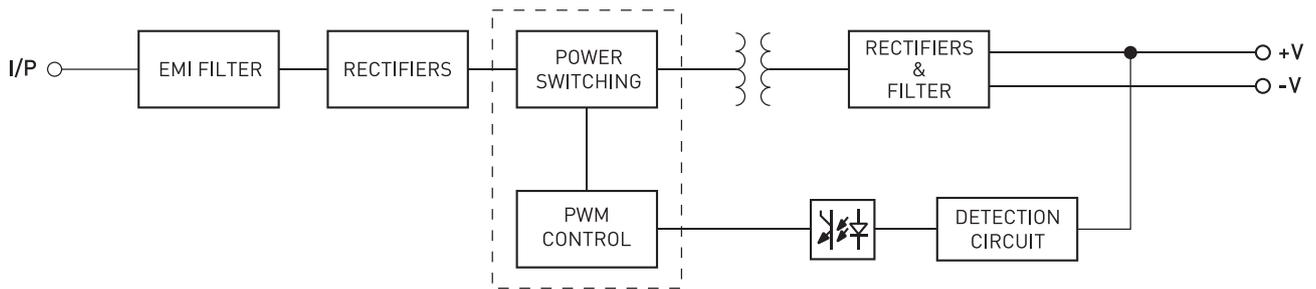

## Dimensiones (mm)

